

DATA SHEET



Product Name **2FT 40W T12 BLB368**
Article No. 15040T12K_0006
Costumer Art. No. ---
Type C77K/U002

Application

This lamp is for technical Applications

General Information

Nominal wattage	40 W
Nominal Length	590 mm
Reflector	none
Cap base	G13
Useful Lifetime	1 year
Mercury content (max)	15 mg
Dimmable	no

Electrical data

On-mode power P_{on}	46,6 W
Type of power supply	230 V / AC / 50 Hz
Operating current	0,950 A
Operating volltage	230 V

DATA SHEET

Product Name **2FT 40W T12 BLB368**
Article No. 15040T12K_0006
Costumer Art. No. ---
Type C77K/U002

Light technical data

UVA irradiance (315-400nm) 8,5 W /m² (+/-15%)


UVB irradiance (280nm-315nm) 0,008 W/m² (+/-15%)

UVB/UVA 0,09 % (+/-0,02)

Color Coordinates

x 0,230 +/-0,012

y 0,250 +/-0,012

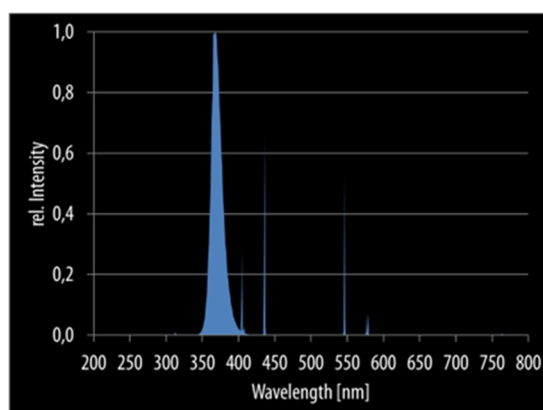

Lamp UVB maintenance after:

100 h 90 %

500 h 80 %

1 000 h 70 %


4 000 h 50 %

DATA SHEET

Product Name **2FT 40W T12 BLB368**
Article No. 15040T12K_0006
Costumer Art. No. ---
Type C77K/U002

Dimension

Length A_{max (cap – cap)} 589,8 mm
Length B_{min (cap – pin)} 594,5 mm
Length B_{max (cap – pin)} 596,9 mm
Length C_{max (pin – pin)} 604,0 mm
Diameter d_{max} 38,0 mm

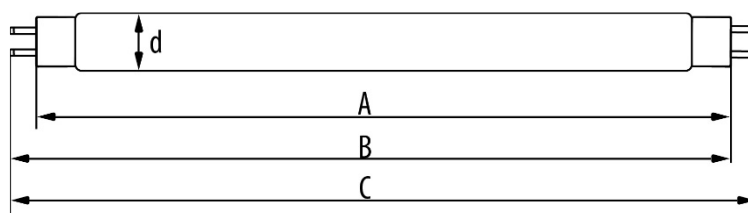

Shipping data

Lamp weight net 153 g
Lamp weight gross 172 g
Content of packaging unit 25 pieces
Length of packaging unit 0,645 m
Width of packaging unit 0,210 m
Height of packaging unit 0,210 m
Volume of packaging unit 0,028 m³
Weight of packaging unit 4,90 kg

Note

The statement given is based on average data, achieved under measurement conditions of Manufacturer. For technical and physical reasons, the values of the individual lamps can vary.

Subject to change.